



PERKO®

EUROPEAN STYLE L.E.D. NAVIGATION LIGHT SETS

Fig. 0170 Series European Style L.E.D. Vertical Mount Navigation Lights


Certified For Use on Sail or Power Driven Vessels Under 20 Meters (65.6 ft.) in Length

CONSTRUCTION:

- Chrome Plated Brass Top and Black Polymer Base
- Black or White Polymer
- 12 or 24 Volt Options

Tech Info

12 or 24 Volt L.E.D.
 Height Overall: 3-5/8"
 Width Overall: 4-1/8"
 Proj. Overall: 2-1/2"
 Screw Size: #10

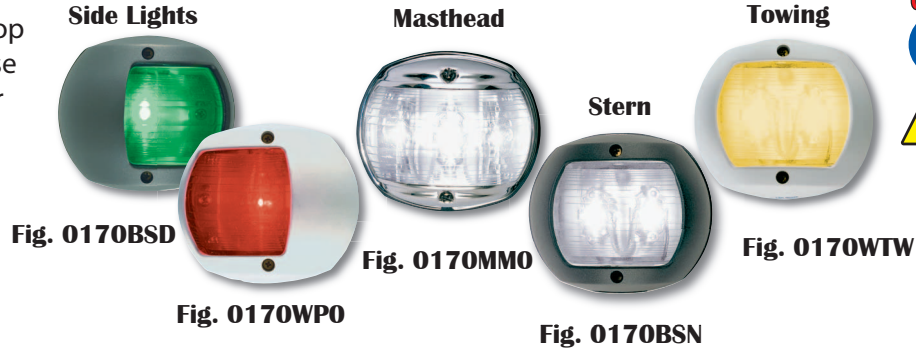

L.E.D. 0170 Series - Ordering Information

	Visibility Arc	Visibility Miles	12 Volt Dealer Pkg. 1 Card 1 Pc. per Card	12 Volt Std. Pkg. 1 Pc.	24 Volt Dealer Pkg. 1 Card 1 Pc. per Card	24 Volt Std. Pkg. 1 Pc.	Ship Wt. Carton Lbs. DP/Std Pkg.
Black Polymer							
Red Side Lit	112-1/2°	2	0170BP0DP3	0170BP012L	0170BP0DP4	0170BP024L	0.7/0.7
Green Side Light	112-1/2°	2	0170BSDDP3	0170BSD12L	0170BSDDP4	0170BSD24L	0.7/0.7
White Masthead	225°	3	0170BM0DP3	0170BM012L	0170BM0DP4	0170BM024L	0.7/0.7
White Stern Light	135°	2	0170BSNDP3	0170BSN12L	0170BSNDP4	0170BSN24L	0.7/0.7
Yellow Towing	135°	2	0170BTWDP3	0170BTW12L	0170BTWDP4	0170BTW24L	0.7/0.7
Chrome Plated Brass							
Red Side Light	112-1/2°	2	0170MP0DP3	0170MP012L	0170MP0DP4	0170MP024L	0.8/0.8
Green Side Light	112-1/2°	2	0170MSDDP3	0170MSD12L	0170MSDDP4	0170MSD24L	0.8/0.8
White Masthead	225°	3	0170MM0DP3	0170MM012L	0170MM0DP4	0170MM024L	0.8/0.8
White Stern Light	135°	2	0170MSNDP3	0170MSN12L	0170MSNDP4	0170MSN24L	0.8/0.8
Yellow Towing	135°	2	0170MTWDP3	0170MTW12L	0170MTWDP4	0170MTW24L	0.8/0.8
White Polymer							
Red Side Light	112-1/2°	2	0170WP0DP3	0170WP012L	0170WP0DP4	0170WP024L	0.7/0.7
Green Side Light	112-1/2°	2	0170WSDDP3	0170WSD12L	0170WSDDP4	0170WSD24L	0.7/0.7
White Masthead	225°	3	0170WM0DP3	0170WM012L	0170WM0DP4	0170WM024L	0.7/0.7
White Stern Light	135°	2	0170WSNDP3	0170WSN12L	0170WSNDP4	0170WSN24L	0.7/0.7
Yellow Towing	135°	2	0170WTWDP3	0170WTW12L	0170WTWDP4	0170WTW24L	0.7/0.7

See Page C-31 for Technical Information.

Figs. 1342 & 1345 L.E.D. White All-Round Lights

Certified For Use on Power Driven Vessels Under 20 Meters (65.6 ft.) in Length

CONSTRUCTION:

- Reduced Glare Design with Clear Fluted Lens & Frosted Globe

- **Fig. 1342:** Black Polymer Top
- 3/4" Pipe Mount Threaded Aluminum Base

- **Fig. 1345:** White Polymer Top & Base

- Fixed Mount Base

Ordering Info

Voltage	Vertical Height Inches	Dealer Pkg. 1 Pc. per Card	OEM Bulk Pkg. 1 Pc.	Ship Wt. Carton Lbs. DP/OEM Bulk
12	7-1/8	1345DP1WHT	1345001WHT	0.8/0.5
12	4-5/8	-----	1342001BLK	0.6
24	4-5/8	-----	1342002BLK	0.6

L.E.D.'s have no user serviceable parts

Tech Info

Fig. 1345
 12 Volt L.E.D.
 Pole: 3/4" Dia. Anodized
 Screw Size: #8
 Base Dimensions:
 1" x 2-5/8"

Fig. 1342
 12 or 24 Volt L.E.D.
 For 3/4" Pipe
 Base Dimensions:
 1-1/2" O.D.



Fig. 1345 Fig. 1342