

LED Utility Lights

LED Utility Lights

Material: Brass Frame
 Finish: Chrome Plated
 Dimensions: 7-1/4" x 1-1/2"
 Installs In: 2-1/8" Diameter Hole
 Screw Size: #6
 Voltage: 12V LED
 Wattage: 4 watt
 Amperage: 0.31 amps
 Features: Lab Rated LED Life 50,000 hours

Fig 0606: All white LED utility light

Fig 0607: White/Red LED utility light to preserve nighttime vision

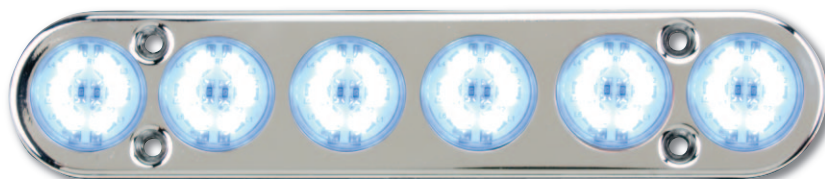


Fig. 0606 - White



Fig. 0607 - with Red On



Fig. 0607 - with White On

LED Color	Retail Pkg.	OEM Bulk Pkg.
White	0606DP0CHR	0606000CHR
White/Red	0607DP0CHR	0607000CHR



Surface Mount Utility Lights

Material: Molded Polymer
 Finish: Black or White
 Dimensions: Length Overall: 1-7/8", Width: 9/16"
 Screw Size: #6
 Voltage: Fig 0137/0140 Fig. 0145
 12V (Bulb Included) 12V LED
 Wattage: 1 watt .25 watts
 Amperage: .08 amps 0.02 amps
 Features: **Figs. 0137/0140:** Diffused Light Cover
 Fig. 0145: LED with Shielded Light Cover



Fig. 0145



Fig. 0137



Fig. 0140

Voltage	Dealer Pkg.	OEM Bulk Pkg.
12V	0137DP0BLK	0137000BLK
12V	0140DP0NYN	0140000NYN
12V L.E.D.	0145DP0NYN	0145000NYN



LED Louvered Cockpit Utility Light

Looks like a vent but functions as a courtesy light

Material: Stainless Steel & Black Polymer
 Finish: Polished
 Dimensions: Width: 3-1/8", Height: 1-5/8"
 Screw Size: #8
 Voltage: 12V LED (Supplied with 6" pig tail wire leads)
 Wattage: .25 watts
 Amperage: 0.02 amps
 Features: Uses less than half the energy draw of standard lights.



Fig. 1033

Finish	Retail Pkg.	OEM Bulk Pkg.
Polished SS	1033DP1STS	1033001STS

Cockpit Utility Lights

Reduced Glare Clear Back Utility Light

The clear back allows light to shine both inside and outside of the mounting location


- Material: Brass or Stainless Steel with Clear Polymer Back
 Finish: Chrome Plated or Polished
 Dimensions: O.D.: 3", Depth: 1"
 Installs In: 2-1/8" Diameter Hole
 Screw Size: #8
 Voltage: 12V (Bulb included), 24V with bulb change
 Wattage: 10 watts
 Amperage: .83 amps
 Features:
- Directs 80% of the light downward, thus reducing cockpit glare.
 - Ideal for mounting on center consoles, storage lockers, cabinets, and electronics boxes.



Fig. 1149

Finish	Retail Pkg.	OEM Bulk Pkg.
Chrome	1149DP112V	114900112V
Polished SS	1149DP1STS	1149001STS

Diagram of center console mt.



Reduced Glare Design Cockpit Light

Directs 80% of the Light Downward, Thus Reducing Cockpit Glare

- Material: Brass, Stainless Steel, or Polymer with Polymer Base
 Finish: Chrome Plated, Polished, or White
 Dimensions: O.D.: 3", Depth: 1"
 Installs In: 2-1/8" Diameter Hole
 Screw Size: #8
 Voltage: 12V (Bulb included), 24V with bulb change
 Wattage: 10 watts
 Amperage: .74 amps



Fig. 1146 Chrome

Finish	Voltage	Retail Pkg.	OEM Bulk Pkg.
Chrome	12	1146DP112V	114600112V
Chrome	24	1146DP224V	114600224V
Polished SS	12	1146DP1STS	1146001STS
Polished SS	24	1146DP2STS	1146002STS
White	12	1146DP1WHT	1146001WHT
White	24	1146DP2WHT	1146002WHT



Stainless



White



Low Profile LED Ceiling Mount Utility Lights

- Material: Brass, Stainless Steel, or White PERKO-Kote with Polymer Base
 Finish: Chrome Plated, Polished, or White
 Dimensions: O.D.: 3"
 Installs In: 2-1/8" Diameter Hole
 Screw Size: #8
 Voltage: 12V LED
 Wattage: 4.5 watts
 Amperage: 0.3 amps
 Features: Uses less than half the energy draw of standard lights.



Fig. 1156 Chrome

Finish	Retail Pkg.	OEM Bulk Pkg.
Chrome	1156DP112V	115600112V
Polished SS	1156DP1STS	1156001STS
White	1156DP1WHT	1156001WHT

Low profile side view



Fig. 1149:
 Socket Assy: 114900099B.
 Lens w/Gasket: 1146DP099A.
 Mounting Flange: 094600099C

Fig. 1146:
 Socket Assy: 114600099B.
 Lens w/Gasket: 1146DP099A.
 Mounting Flange: 094600099C

Spare Parts Information



Fig. 1146 & 1149 Bulbs:
 12 Volt Bulbs: 0070DP0CLR.
 24 Volt Bulbs: 0067DP1CLR.

Utility Lights

Flush Mount Utility Lights with Snap on Front Cover

Material:	Polymer
Finish:	Black or White
Dimensions:	2-1/4" x 2-1/4", Depth: 15/16"
Installs In:	1-3/4" Diameter Hole
Screw Size:	#6
Voltage:	Fig. 1044 Fig. 1074
	12V (Bulb included) 12V LED
Wattage:	3 watts .25 watts
Amperage:	.23 amps 0.02 amps
Features:	• Concealed mounting screws • Easy to install • Flush mounting • Diffusion lens

Style No. 1: Supplied with 1/4" Spade Connectors (Fig. 1044 only)
 Style No. 2: Supplied with 7" Pig Tail Wire Leads

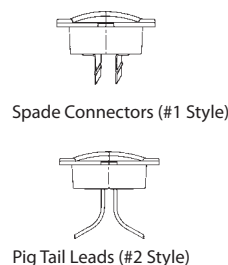


Fig. 1044
Black



Fig. 1074
LED White

Color	Style	Connection	Retail Pkg.	OEM Bulk Pkg.
Black	1	Spade	1044DP1BLK	1044001BLK
Black	2	Pig Tail	1044DP2BLK	1044002BLK
White	1	Spade	1044DP1WHT	1044001WHT
White	2	Pig Tail	1044DP2WHT	1044002WHT
Black	LED 2	Pig Tail	1074DP2BLK	1074002BLK
White	LED 2	Pig Tail	1074DP2WHT	1074002WHT



Spade Connectors (#1 Style)

Pig Tail Leads (#2 Style)



LED



Incandescent



Adjustable Utility Light

Material:	Zinc Alloy
Finish:	Chrome Plated
Dimensions:	O.D. Overall: 2-5/8", Length Neck: 3/4", O.D. Neck: 7/8"
Installs In:	1" Diameter Hole
Screw Size:	#6
Voltage:	12V (Bulb Included)
Wattage:	7 watt
	.58 amps
Features:	Shield swivels to change light direction



Fig. 1254

Type	Dealer Pkg.
Incandescent	1254DP0CHR



Spare Parts Ordering Information

Fig. 1044
Bulbs: 1044DP099A.

Fig. 1254:
Bulbs: 0337011DP.
Socket: 0024DP1.



Surface Mount Lights

Surface Mount Dome Lights

Material: Zinc Alloy, Clear Polymer Lens with Black Vinyl Mounting Gasket
 Finish: Fig. 0300: Chrome Plated
 Dimensions: See Below
 Screw Size: Size 0 & 1: #10 R.H., Size 2: #12 R.H.
 Voltage: 12V (Bulb included)
 Features: Push Switch with Water Resistant Boot



Fig. 0300

O.D. Base Dimensions	Lens Size	Depth Overall	Wattage Bulb Supplied	Amps	Max. Wattage	Retail Pkg.	OEM Bulk Pkg.
3-3/4"	3"	1-1/2"	7	.58	11	0300DP0CHR	0300000CHR
5"	4"	1-7/8"	11	.94	17	0300DP1CHR	0300001CHR
6"	5"	2"	17	1.44	17	0300DP2CHR	0300002CHR



Surface Mount Dome Lights

Material: Zinc Alloy, Clear Polymer Lens with Black Vinyl Mounting Gasket
 Fig. 1253: Ivory PERKO-KOTE
 Dimensions: See Below
 Screw Size: Size 1: #10 R.H., Size 2: #12 R.H.
 Voltage: 12V (Bulb included)
 Features: Push Switch with Water Resistant Boot



Fig. 1253

O.D. Base Dimensions	Lens Size	Depth Overall	Wattage Bulb Supplied	Amps	Max. Wattage	Retail Pkg.	OEM Bulk Pkg.
5"	4"	1-7/8"	11	.94	17	1253DP1WHT	1253001WHT
6"	5"	2"	17	1.44	17	1253DP2WHT	1253002WHT



Push Button Switch

Material: Black Polymer with Weather Resistant Cover
 Voltage: Rated for 10 Amps at 12, 24 and 32 Volts
 Features: Push-On, Push-Off



Fig. 0701



Max. Thickness of Panel	Diameter Neck	Retail Pkg.
1/8"	3/8"	0701DP

Spare Parts Information



Fig. 0337

Figs. 0300 & 1253

Bulbs for Size #0: 0337011DP.

Bulbs for Size #1: 0337012DP

Bulbs for Size #2: 0337013DP.

Switch: 0701DP.

Socket: 0024DP1.

Lens: 0257DP, Specify Size; 3", 4" or 5"

NOTE: To use in a 24 volt system, order replacement bulb : 0337014DP.

Surface Mount Lights

CE

Dimmer Capable LED Surface Mount Dome Light

Material: Zinc Alloy and Clear Polymer Lens
 Finish: Chrome Plated or White PERKO•KOTE
 Dimensions: O.D.: 3-5/8", Depth: 1"
 Screw Size: #8 R.H.
 Voltage: 12 Volt LED or 24 Volt LED
 Wattage: 8 watts 3 watts
 Amperage: 0.66 amps 0.12 amps
 Features: On/Off Switch



Fig. 1356

Chrome

White

Finish	Voltage	Retail Pkg.	OEM Bulk Pkg.
Chrome	12V	1356DP0CHR	1356000CHR
Chrome	24V	1356DP2CHR	1356002CHR
White	12V	1356DP0WHT	1356000WHT
White	24V	1356DP2WHT	1356002WHT

Please contact the factory for availability of devices for applications that require a Multiple Light Wall Dimmer Switch for Fig. 1356.



Surface Mount Dome Lights with Red and White Bulbs

Material: Zinc Alloy, Clear Lens
 Finish: Ivory PERKO•KOTE
 Dimensions: O.D. Lens: 4"
 Screw Size: #10 R.H.
 Voltage: 12V (Bulbs Included)
 Features:

- Three Position Toggle Switch (Red-Off-White)
- Red light helps preserve night vision



Fig. 1263

O.D. Base Dimensions	Depth Overall	Wattage Bulb Supplied	Max. Amps	Max. Wattage	Retail Pkg.	OEM Bulk Pkg.
5"	1-7/8"	7	.94	18	1263DP1WHT	1263001WHT

PROP 65 WARNING
(Contains DINP)

CE

Bulkhead Light Fixture

Material: Zinc Alloy
 Finish: Chrome Plated
 Dimensions: Base: 2-1/2" x 1-3/4", Projection: 2-5/8"
 Screw Size: #6 R.H.
 Voltage: For Systems up to 50 Volts (Bulb not Included)
 Features: Medium Screw Socket and Turn Switch



Fig. 0217

Finish	Retail Pkg.
Chrome	0217DP0CHR

Spare Parts Information



Fig. 0337

Fig. 1263:

Clear Bulbs: 0337012DP
 Red Bulbs: 0337R12DP
 Lens: 0257DP4

Three Position Toggle Switch: 1263DP099A
 Socket: 0024DP1

Fig. 0217:

Bulb Socket Assembly with Switch and Knob: 0223.
 Order Perko Bulb 0340, See Page 69.

Surface Mount Lights

Dome Light with Toggle Switch

- Material: Bronze with Clear Glass Lens
 Finish: Chrome Plated
 Dimensions: O.D. Lens: 6", O.D. Base: 7-7/8", Depth: 3-1/8"
 Screw Size: #8
 Voltage: Incandescent: For up to 50 volt systems (Bulbs Not Included)
 LED: 12V AC/DC
 Features: **Incandescent Version:**
- Twin Double Contact Bayonet Sockets
 - Will Accommodate Two Bulbs up to 20 Watts Each



Fig. 0555

Light Type	Standard Pkg.	Voltage
Incandescent	0555000CHR	Up to 50 Volts
LED	0555L00CHR	12V



Dome Light with Toggle Switch

- Material: Wrought Brass with Frosted Glass Lens
 Finish: Chrome Plated
 Dimensions: O.D. Glass: 8", O.D. Base: 9-1/2", Depth: 4"
 Screw Size: #10 R.H.
 Voltage: Incandescent: For up to 50 volt systems (Bulbs Not Included)
 LED: 12V AC/DC
 Features: **Incandescent Version:**
- Medium Screw Socket
 - Size No. 1 Has One Socket and Switch. Will Accommodate One Bulb Up To 50 Watts
 - Size No. 2 Has Two Sockets and Switches. Will Accommodate Two Bulbs Up To 25 Watts Each



Fig. 0753

Light Type	Standard Pkg.	Bulbs	Voltage
Incandescent	0753001CHR	1	Up to 50 Volts
Incandescent	0753002CHR	2	Up to 50 Volts
LED	0753L01CHR	LED	12V



Meal and Absent Light

- Material: Bronze with Blue & White Glass Globes
 Finish: Chrome Plated
 Dimensions: O.D. Globe: 2-1/2", Length: 9", Base: 3-3/8" x 1-3/4"
 Screw Size: #8
 Voltage: 12V (Bulb Not Included)
 Wattage: 7 watts
 Amperage: .58 amps
 Features:
- Double Contact Bayonet Sockets
 - Blue Owner Absent Light and White Mealtime Light
 - Replaces Blue and White Flags for Use at Night
 - For Mounting on Main Starboard Yardarm



Fig. 0329

Light Type	Standard Pkg.
Meal & Absent	0329000CHR



Figs. 0555:

Bulb: Fig. 0337
 Switch: 0514DP.
 Lens: 0257DP6.
 Socket: 0276000.

Fig. 0753:

Bulb: Fig. 0340, Switch, Cat. No. 0514DP.
 Socket: 1323.
 Flat Lens For Newer 0753 Style (4" Depth): 0132FLTRD.
 Curved Lens For Older 0753 Style (3" Depth): 0132CVDFRD.

Spare Parts Information



Fig. 0337



Fig. 0340

Fig. 0329:

Required Bulbs For 12 Volt: 0337011DP.
 For 32 Volt Applications use ANSI 624 Bulb
 Globes: Blue: 0250000BLU. White: 0250000WHT.
 Socket: 0024DP1.

For Figs 0555 & 0753 Bulbs, refer to Page 69 for Bulb Selection.

Spare Bulbs for Utility Lights

Note: Bulbs Must Be Ordered in Standard or Retail Package Quantities Only!

Bulbs for Navigation Lights Recreation Cat. 320 Page 61 and Commercial Cat. 315-C Page C-39

Double Contact Bayonet Base Bulbs - Clear

Nominal Voltage	Wattage	Amps	Retail Pkg.	Bulbs per Card	Bulb Diameter Inches	Mfr. Lamp No.
12	7	.58	0337011DP	2	3/4	90
12	11	.94	0337012DP	2	3/4	1004
12	18	1.53	0337R12DP*	2	1	1142R
12	17	1.44	0337013DP	2	1	1142
24	15	.63	0337014DP	1	1	306
120	15	---	0337023DP	2	7/8	15T7

* Red Bulb



Fig. 0337

Festoon Bulbs - Double Ended Clear with Nickel Plated Brass

Nominal Voltage	Wattage	Amps	Retail Pkg.	Bulb Dia. Inches	Bulb Length Inches
12	10	.74	0070DP0CLR	3/8	1-11/16
12	15	.97	0070DP1CLR	9/16	1-11/16
24	10	.42	0067DP1CLR	3/8	1-11/16



Fig. 0067

Fig. 0070



Medium Screw Bulbs

Nominal Voltage	Wattage	Amps	OEM Bulk Pkg.	Type	L.C.L. Inches	Mfg. Lamp No.
12	15	1.25	0340005FRD	A-17	2-3/8	15-A
12	25	2.08	0340006FRD	A-19	2-9/16	25-A
12	50	4.16	0340007FRD	A-21	3-7/16	50-A21
32	15	.47	0340011FRD	A-17	2-3/8	15-A
32	25	.78	0340012FRD*	A-19	2-9/16	25-A
32	50	1.56	0340013FRD*	A-21	3-7/16	50-A21



Fig. 0340

**Note: For High Power Bulbs and Sealed Beam Units for Searchlights, See website.
Electric Bulbs Are Not Returnable. Order Carefully.**